

# *Northwest Territories Power Corporation*



*Greenhouse Gas Report  
2003/04*



# TABLE OF CONTENTS

Message from our President and Chief Executive Officer .....	1
Introduction .....	2
Corporate Profile.....	2
Commitment to Reducing Greenhouse Gas Emissions .....	3
Management System.....	4
External Verification.....	4
Base Year Quantification .....	5
Baseline Quantification .....	5
Direct and Indirect Emissions .....	5
Emissions Calculations.....	6
Forecast Emissions .....	6
2003/2004 Greenhouse Gas Emissions .....	7
Hydropower Generation.....	7
Diesel Generated Power.....	7
Natural Gas Generated Power .....	8
Actual Emissions for 2003/04 .....	8
Emissions Intensity .....	9
Forecast Emissions .....	9
Natural Gas Generation Developments.....	10
Business as Usual Forecasting .....	11
Emissions Reductions Targets .....	11
Results Achieved and Measures to Achieve Results .....	12
Fuel Efficient Engine Upgrades .....	12
Programmable Logic Controllers (PLC).....	13
Reduction in Station Service / Residual Heat Recovery.....	13
Colville Lake Residual Heat Project.....	14
Alternative Generation Fuels / Methods .....	15
Bluefish Hydro Purchase .....	15
Proposed Hydro Developments.....	15
Mini Hydro in Lutsel K'e .....	16
Streetlight Replacement .....	16
Transmission and Distribution Lines.....	16
Residential Energy Efficiency Program .....	16
Results in Comparison to Targets .....	17
GHG Emissions .....	17
CO <sub>2</sub> e Station Service Target .....	17
Climate Change Awareness .....	18
Internal Communications .....	19
Conclusion .....	20
Contact Information .....	20
APPENDIX 1.....	21

## *Message from our President and Chief Executive Officer*

**T**he Northwest Territories Power Corporation (NPTC) is pleased to once again submit our greenhouse gas (GHG) report to the Voluntary Challenge and Registry (VCR) Inc. In 1999, NPTC's first submission to the VCR was awarded Gold Champion Level Reporting Status, a status maintained annually since then. With the achievement of Best New Submission in 1999 and the Leadership Award for the Electricity Sector in 2000/01, NPTC has set a high standard for itself to maintain. NPTC's submission of this 2003/04 Progress Report illustrates our continued commitment to regular reporting and initiatives to reduce GHG emissions.

In 2003/04, NPTC produced 88,427 Tonnes of CO<sub>2</sub> equivalent GHG emissions, a successful decrease of 37% from 1990/91 levels (Baseline). NPTC decreased total generation by 7,229 MWh from 2002/03 to 392,520 MWh. In a year with water levels well below average for hydro generation, diesel generation was increased to compensate. Special attention was therefore paid to initiatives such as station service reduction, residual heating projects, and the installation of more efficient streetlights to minimize GHG emissions. In early 2003 NPTC purchased the Bluefish Hydro facility from Miramar (owner of Con Mine), power from which was used to help meet Yellowknife power demands, displacing diesel power and helping to further reduce GHG emissions.

NPTC has been successful in decreasing its greenhouse gas emissions to well below the 1990 Baseline levels as well as NPTC's internal target of 10 percent below 1996/97 levels, yet we strive to further reduce emissions where feasible. Through programs to increase Corporation-wide fuel efficiency, reduce our own station service demands, promote public awareness of energy efficiency, and carry out research into alternative sources of power generation, NPTC will continue to reduce its production of greenhouse gases.

Through regular reporting to the VCR, we will monitor our initiatives, progress, and success in reducing greenhouse gas emissions in the north.

Yours truly,



Leon Courneya  
President and Chief Executive Officer



# INTRODUCTION

The Voluntary Challenge and Registry (VCR) Program provides a nationally recognized and reviewed avenue for businesses to report Greenhouse Gas (GHG) emissions. Through the VCR, the Northwest Territories Power Corporation (NTPC) demonstrates its ongoing commitment to voluntarily reduce GHG emissions. Since our first annual VCR submission in 1999, we have achieved Gold Champion Level Reporting Status yearly, as well as Best New Submission in 1999 and the Leadership Award for the Electric Utilities Sector in 2000/2001. NTPC is proud to present our 2003/04 VCR report. In our latest report, we not only quantify our air emissions, but also outline the many initiatives taken to further reduce GHG emissions and help preserve one of the world's most unique and beautiful environments.



## Corporate Profile

The Northwest Territories Power Corporation is a Crown corporation wholly owned by the Government of the Northwest Territories. NTPC was created in 1988 when the Territorial Government purchased shares of the federally owned Northern Canada Power Commission. Today we are the primary power producer in the Northwest Territories (NWT). We distribute electricity to the end-use consumer in 27 communities and supply electricity on a wholesale basis to two distributing utilities. These utilities in turn retail electricity to customers

in the Yellowknife and Hay River areas. As a Crown corporation, we have a mandate to operate as a viable business enterprise.

NTPC operates 31 power plants, including the standby diesel generation facilities within the Snare and Taltson hydro systems and the Inuvik and Norman Wells natural gas systems. Figure 1 shows the NWT and the locations of communities served by NTPC. NTPC's facilities include hydroelectric, diesel, and natural gas generation plants, as well as transmission systems and numerous isolated electrical distribution systems. NTPC also owns and operates alternative energy assets used for the supply of residual heat. Up until purchasing the Bluefish hydro facility on March 31, 2003, NTPC purchased GHG-free hydroelectric power from the facility. We also purchase natural gas generated power in Norman Wells.

Figure 1: NTPC Service Area



NTPC serves a population of approximately 42,000 people located in an area of 1.2 million square kilometers. Approximately 67% of the population lives in the North and South Slave regions, while the rest of the population resides in small communities widely dispersed throughout the NWT. The total electrical load for the NWT is approximately 65 MW, with isolated power systems having generating capacities ranging from 190 kW at Colville Lake to 59.6 MW at Snare/Yellowknife. As these systems are isolated and unconnected, each must be planned for and operated independently.

### **Commitment to Reducing Greenhouse Gas Emissions**

NTPC operates within a Corporate Strategic Plan, developed in 1997 and reviewed regularly by Senior Management and the Board of Directors. The following initiatives are outlined in the Strategic Plan to maintain or further decrease our production of greenhouse gas (GHG) emissions:

- We will reduce GHG emissions on a per kilowatt-hour basis by 10% from 1996/97 levels in 10 years.
- We will endeavour to increase our supply-side energy efficiencies by increasing our use of technologies such as the Internet, Turtle meters, more fuel-efficient engines, Programmable Logic Controllers (PLCs), and more efficient streetlights to reduce our costs, improve plant efficiencies, and reduce GHG emissions.
- We will strive to increase our own energy efficiencies through efforts to decrease station service at our plants and offices and increase the use of residual heat within our own facilities.
- We will develop residual heat projects in as many communities as is economically feasible. While this does not directly reduce our own GHG emissions, it reduces the amount of diesel fuel required for heating within a community as well as for transportation of that fuel to the community.

- We will assist in the development of natural gas infrastructure independently and in joint ventures to ensure a supply of gas for power generation and to decrease the production of GHG emissions.
- We will pursue additional hydro opportunities for the NWT and strive to provide additional hydro for mines.
- We will monitor the development of alternate power generation technologies such as wind, solar power generation, and fuel cells.
- We will encourage conservation of energy through customer education programs: through demand-side energy conservation, we reduce the amount of energy required by customers. This results in less diesel fuel burned to meet community electricity demands, particularly in the more remote communities. Less fuel required in a community translates into reductions of GHG emissions produced in transporting fuel to the community, an indirect saving.

Although we already achieved our target to reduce GHG emissions by 10% of 1996/97 levels, we will continue to further decrease our production of GHG emissions where feasible.

NTPC began development of an ISO 14001 compliant Environmental Management System (EMS) in 2002/03. The EMS includes a review of current climate change practices implemented by NTPC, which will help develop and monitor new targets.





## Management System

Our GHG emissions are monitored at the most senior levels of NTPC by the Board of Directors and the President and CEO. Senior Management not only review and approve NTPC's Strategic Plan, but review and approve any GHG initiatives through the annual capital and financial planning process. The Minister in charge of NTPC is also kept advised of major issues regarding NTPC, including our GHG programs.

Through our annual VCR submission, we analyze and monitor NTPC's success in reducing GHG emissions. Corporate data from the Environmental, Financial, and Engineering departments is compiled, analyzed and reviewed at a management level to generate the VCR report. The President and CEO reviews the report prior to submission to the VCR. Once submitted, NTPC's GHG emissions status is reported to both the Board of Directors and the Minister.



## External Verification

The Auditor General of Canada annually carries out external verification of Corporation data, including fuel consumption and generation statistics.

Through the Public Utilities Board (PUB) process for setting power rates, all aspects of our operations, including our GHG initiatives and their associated costs and benefits, are reviewed publicly and by the PUB.

In 2003, Environment Canada's National Pollutant Release Inventory (NPRI) introduced Criteria Air Contaminants (CACs) into their list of toxic substances to be reported annually. NTPC now reports emissions annually to the NPRI as well as to the VCR.



# BASE YEAR QUANTIFICATION

**N**TPC used the 1990/91 fiscal year to create a Baseline for emissions against which to compare subsequent years.

## Baseline Quantification

Emission factors from the 2004 VCR Guide were used to calculate emissions. Table 1 illustrates our 1990/91 emissions according to GHG type.


**Table 1: Baseline Emissions Estimates by Greenhouse Gas Type**

Fiscal Year	Tonnes			
	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub> Equivalent Total Emissions
1990/91	134,588	8	19	140,723



Hydro, diesel, and purchased natural gas generated power accounted for 61%, 37%, and 2% of total generation in 1990/91, respectively. Figure 2 illustrates 1990/91 percent generation according to source.

**Figure 2: Power Generation by Source for 1990/91 (Baseline Year)**

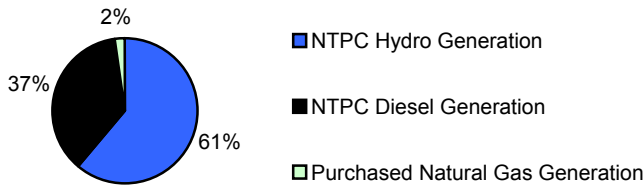

## Direct and Indirect Emissions

Direct GHG emissions result from the combustion of fossil fuels to generate electricity in Corporation-owned diesel and natural gas facilities.

Indirect emissions are those created or saved by operations not directly controlled by NTPC, but affected by Corporation business decisions. These include emissions produced from purchased natural gas generated power and emissions saved as the result of residual heat projects providing heat to buildings not owned by NTPC.

In 1990/91, NTPC did not own any natural gas generating facilities. All natural gas generation emissions at that time were therefore indirect emissions resulting from the purchase of natural gas generated power in Norman Wells. Table 2 illustrates NTPC's emissions according to source for 1990/91.

**Table 2: Baseline GHG Emissions by Source**

Fiscal Year	CO <sub>2</sub> Equivalent Tonnes		
	Diesel Generation	Gas Generation	Total Emissions
1990/91	136,555	4,168	140,723

## Emissions Calculations

Greenhouse gas emissions to date have been calculated using NTPC's actual fuel consumption data for the periods covering 1990/91 to 2003/04. Combusted fuel is converted to GHG emissions using the emissions factors provided in the *2004 VCR Guide* as follows:

**Table 3: Emissions Factors by Gas Type**

Source	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O
Natural Gas	1,891 g/m <sup>3</sup>	0.49 g/m <sup>3</sup>	0.049 g/m <sup>3</sup>
Industrial Boiler			
Diesel Motor	2,730 g/L	0.13 g/L	0.40 g/L

The following equivalency factors provided in the VCR Guide were utilized to calculate GHG carbon dioxide equivalency (CO<sub>2</sub> e):

**Table 4: Carbon Dioxide Equivalency Factors**

Greenhouse Gas Type	CO <sub>2</sub> e Factor
CO <sub>2</sub>	1
CH <sub>4</sub>	21
N <sub>2</sub> O	310

Emissions produced from oil-fired furnaces in Corporation owned housing, Corporation office buildings, etc. are not reported. Corporation buildings heated by residual heat or electricity directly from Corporation power plants are however included in emissions estimates.

Due to the low volume of Corporation owned vehicles (61 on average) and the limited distances driven annually, GHG emissions produced from vehicles are not included in this report.



## Forecast Emissions

Forecast emissions are based on predicted future power generation values for 2004/05 to 2009/10, which are divided by three-year weighted averages for plant efficiencies to determine fuel consumption. This method of forecasting incorporates the previous year's improvements to fuel efficiencies, upgrades to streetlights and transmission lines, and reductions to station service.

Average hydro generation (assuming normal precipitation levels, as most water comes from runoff) is used to forecast the amount of diesel generation required for those communities where diesel generation supplements hydro generation.

# 2003/2004 GREENHOUSE GAS EMISSIONS


**D**iesel combustion for the production of power generation is our major source of GHG emissions. Since 1990, diesel generated emissions have accounted for an average of 91% of our total GHG emissions. The following section illustrates our production of GHG emissions and the efforts taken in the last year to reduce our reliance on diesel generated power.

## Hydropower Generation

Hydropower generation is dependent on water levels, and thus varies from year to year. In years of low hydropower generation, diesel generation is increased to meet hydropower shortfalls. The majority of NTPC's GHG emissions result from diesel generation, so when hydro generation is low, GHG emissions increase. This was the case in 2003/04, when lower than average water levels created the need for more diesel generation. GHG levels remain significantly below 1990/91 levels but are slightly higher than 2002/03 levels.

Hydropower is currently the cleanest power NTPC can provide to its customers. As diesel generation is utilized as backup power generation for the hydro systems, the more hydropower we are able to produce the more diesel generated power we displace. Figure 3 shows NTPC's average power generation by source for 1990/91 and 2003/04.

**Figure 3: Average Power Generation by Source for 1990/91 and 2003/04**

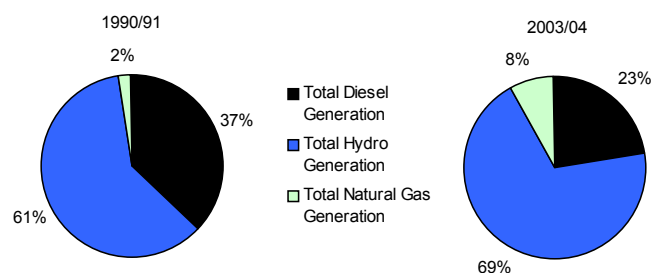

In 2003/04, the Snare, Bluefish, and Taltson hydro systems produced 163,108 MWh, 48,032 MWh, and 59,613 MWh of power, respectively. In the absence of hydropower, all this power would have been generated from diesel. Hydropower generation accounted for 69% of our total generation for 2003/04, an 8% increase over 1990/91 levels.

## Diesel Generated Power

NTPC's consumption of diesel fuel for generation purposes, our major source of GHG emissions, has decreased dramatically over the years. In 1990/91, 37% of total generation came from diesel generated power. In 2003/04, diesel generated power accounted for only 23% of NTPC's total power generation. Our decreased reliance on diesel generated power has allowed us to reduce our diesel generated CO<sub>2</sub> equivalent emissions from 136,555 tonnes in 1990/91 by 48% to 70,689 tonnes in 2003/04. Table 5 shows NTPC's CO<sub>2</sub> equivalent emissions from all sources, both direct and indirect.

**Table 5: GHG Emissions Produced Relative to Generation Source**

Fiscal Year	Direct		Indirect	Total Emissions
	Diesel Generation	Natural Gas Generation	Natural Gas Generation	
CO <sub>2</sub> Equivalent Emissions (Tonnes)				
1990/91	136,555	0	4,168	140,723
1991/92	130,099	0	4,216	134,316
1992/93	132,223	0	4,245	136,468
1993/94	135,936	0	4,473	140,409
1994/95	177,699	0	4,446	182,146
1995/96	178,125	0	3,962	182,086
1996/97	123,637	0	3,755	127,391
1997/98	104,813	0	4,189	109,002
1998/99	93,505	0	4,213	97,718
1999/00	54,291	6,610	3,944	64,845
2000/01	49,284	11,293	3,891	64,468
2001/02	47,734	12,880	3,888	64,502
2002/03	63,297	12,716	3,969	79,982
2003/04	70,689	13,166	4,572	88,427

## Natural Gas Generated Power

NTPC continues to replace diesel generated power with less GHG intensive natural gas generated power. In 1990/91, NTPC's only source of natural gas generated power was purchased power in Norman Wells. In 2003/04, NTPC produced 8% of its total generation from natural gas generated power; 6% NTPC-generated power and 2% purchased power. This means that NTPC successfully generated approximately 6% more natural gas generated power in 2002/03 than in 1990/91.

## Actual Emissions for 2003/04


Once again, NTPC was able to produce more electricity while producing fewer emissions per MWh than in 1990/91. This was accomplished by maximizing hydro and natural gas generated power over the more GHG intensive diesel generation. In 2003/04, NTPC produced 88,427 tonnes of CO<sub>2</sub> equivalent emissions, a decrease of 37% from 1990/91 levels. NTPC's GHG emissions remain well below the 1990/91 Baseline levels and NTPC's target to reduce emissions to 10% below 1996/97 levels. Figure 4 illustrates NTPC's GHG emissions from 1990/91 to 2003/04.

Because of low water availability on the Snare Hydro system, increased diesel generation resulted in 8,445 tonnes more GHG emissions produced in 2003/04 than in 2002/03. This amount is still 37% below 1990/91 levels. Table 6 illustrates our GHG emissions according to gas type and emissions intensity from 1990/91 to 2003/04.

**Table 6: GHG Emissions by Gas Type**

Fiscal Year	Tonnes			Total CO <sub>2</sub> Equivalent Emissions	Emissions Intensity (Tonnes/MWh)
	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O		
1990/91	134,588	8.35	19.22	140,723	0.377
1991/92	128,467	8.05	18.32	134,316	0.355
1992/93	130,525	8.15	18.62	136,468	0.340
1993/94	134,299	8.33	19.15	140,409	0.339
1994/95	174,184	10.21	24.99	182,146	0.447
1995/96	174,113	10.03	25.04	182,086	0.427
1996/97	121,838	7.51	17.40	127,391	0.302
1997/98	104,281	6.65	14.78	109,002	0.264
1998/99	93,502	5.94	13.20	97,718	0.264
1999/00	62,294	5.29	7.87	64,845	0.169
2000/01	62,080	6.12	7.29	64,468	0.167
2001/02	62,857	6.46	7.11	64,502	0.163
2002/03	76,952	7.15	9.29	79,982	0.200
2003/04	85,055	7.75	10.35	88,427	0.225

**Figure 4: Total CO<sub>2</sub> Equivalent Emissions between 1990/91 and 2003/04**

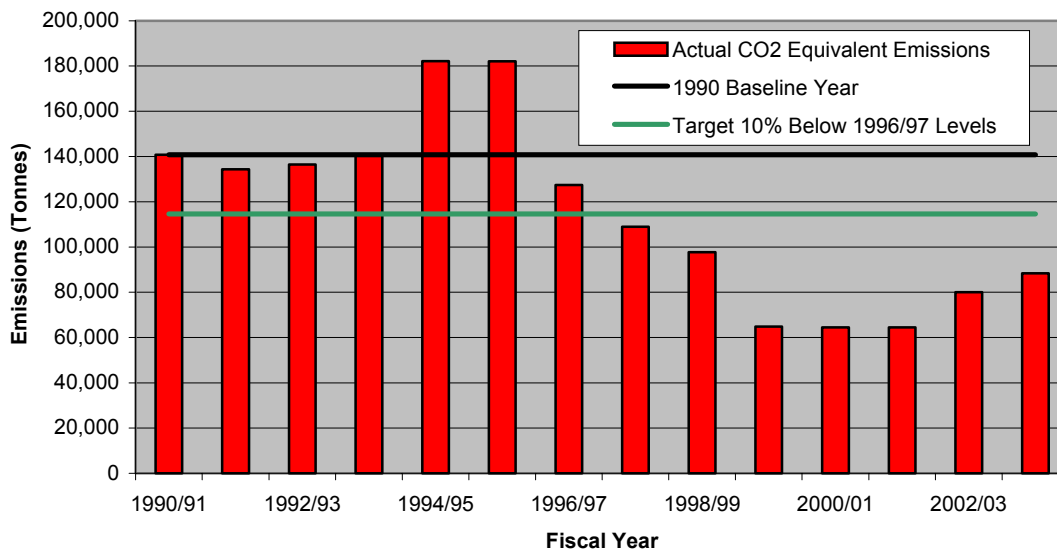

## Emissions Intensity

Emissions intensity is a product of the CO<sub>2</sub> equivalent emissions produced in relation to our total power generation from all sources (tonnes/MWh). As diesel generated power is our major source of GHG emissions, the lower our emissions intensity is the more successful we are at meeting our power generation demands from other, cleaner sources.

NTPC generated 18,584 MWh less hydropower in 2003/04 than in 2002/03, while generating 9,686 MWh more power from diesel and generating and purchasing 1,669 MWh more natural gas generated power. This translates into a GHG emissions intensity of 0.225 tonnes/MWh for 2003/04. While the 2003/04 value is slightly higher than the emissions intensity of 0.200 from 2002/03, it is still well below the 0.377 tonnes/MWh from 1990/91.


## Forecast Emissions

NTPC's forecast GHG emissions for the period of 2004/05 to 2009/10 range from 38% to 59% below the 1990/91 Baseline levels. Figure 5 illustrates forecast CO<sub>2</sub> equivalent emissions to 2009/10.

Total emissions in 2004/05 are expected to be similar to those of 2003/04, but are then anticipated to be significantly lower over the next 5 years. Forecast hydro generation, based on a long-term average water level forecast, is the main influence on forecast emissions. An average production of 170,000 MWh of hydropower per forecast year at Snare, 69,000 MWh at Taltson, and 41,000 MWh at Bluefish is forecast over the next six years. Due to the great influence of water availability on hydro generation, actual emissions depend more so on water levels than on NTPC's initiatives to reduce GHG emissions. Recent years prior to 2002/03 were high water years, but 2002/03 and 2003/04 exhibited lower than average water levels, accounting for the lower percentage of hydro generation in relation to past years and the increased emissions.

The last five years of the forecast show a significant decrease in emissions, despite forecasting hydro generation at average water levels. Additional hydropower, made available through NTPC's purchase of the Bluefish Hydro facility from Miramar on April 01, 2003, is mainly responsible

**Figure 5: 2003/04 Forecast CO<sub>2</sub> Equivalent Emissions as a Product of Total Generation**

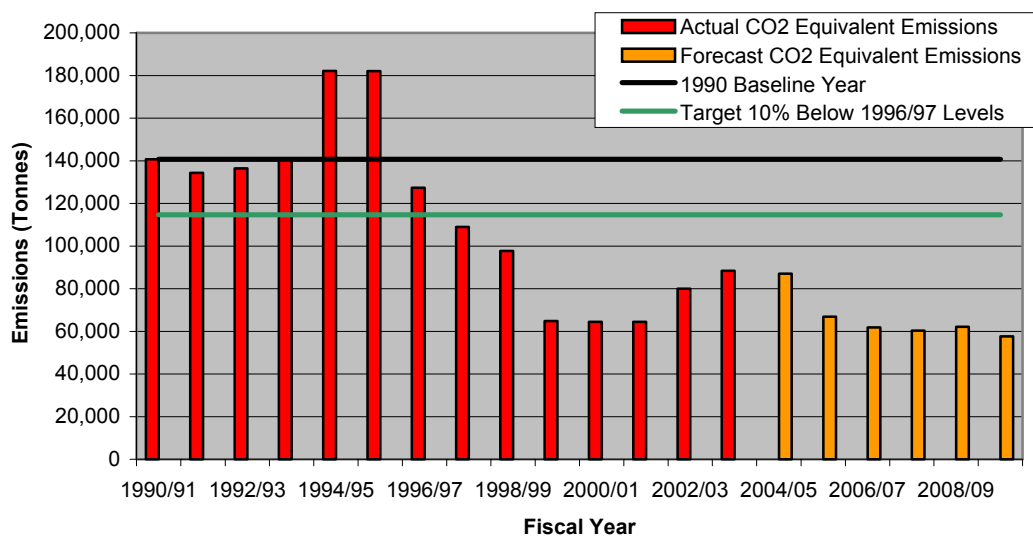

for this projected decrease in forecast emissions.


The Bluefish Hydro facility originated to supply power to Con Mine (owned by Miramar and located in Yellowknife). Historically, NTPC either supplied power to or from Miramar, depending on water levels and the mine's requirements. In November of 2003, Con Mine terminated mining operations, significantly reducing its electrical requirements. With mine reclamation scheduled for 2005, it is because of NTPC's purchase of the site, it is anticipated that the hydro power no longer required by the mine will be available to meet Yellowknife power demands, thereby reducing diesel fuel consumption. By 2009/10, it is expected that NTPC emissions production will decrease to 59% below 1990/91 levels. Between 2006/07 and 2009/10, we anticipate using an average of only 630 kL of diesel fuel annually to meet Yellowknife demands. This will produce only 1800 tonnes of CO<sub>2</sub> equivalent emissions per year to service Yellowknife power demands, compared to the 55,923 tonnes produced in 1990/91. Figure 6 illustrates percent change in NTPC emissions relative to 1990/91 levels for actual and forecast years.



### Natural Gas Generation Developments

As a result of converting NTPC's main generating station in Inuvik from diesel to natural gas in 1999, NTPC made it feasible for the producers and distributors of natural gas to expand their local market. NTPC has been working with the Town of Inuvik over the last two years with the installation and operation of two natural gas fired micro-turbine units to supply combined electricity and residual heat to the Town's recreation complex. This demonstration project is NTPC's first venture involving micro-turbines. Although the units have not performed as expected to date, they have contributed to GHG reductions in the community from the combined electricity and heat production of the micro-turbines.

**Figure 6: GHG Emissions Percent Change Relative to Baseline Data**

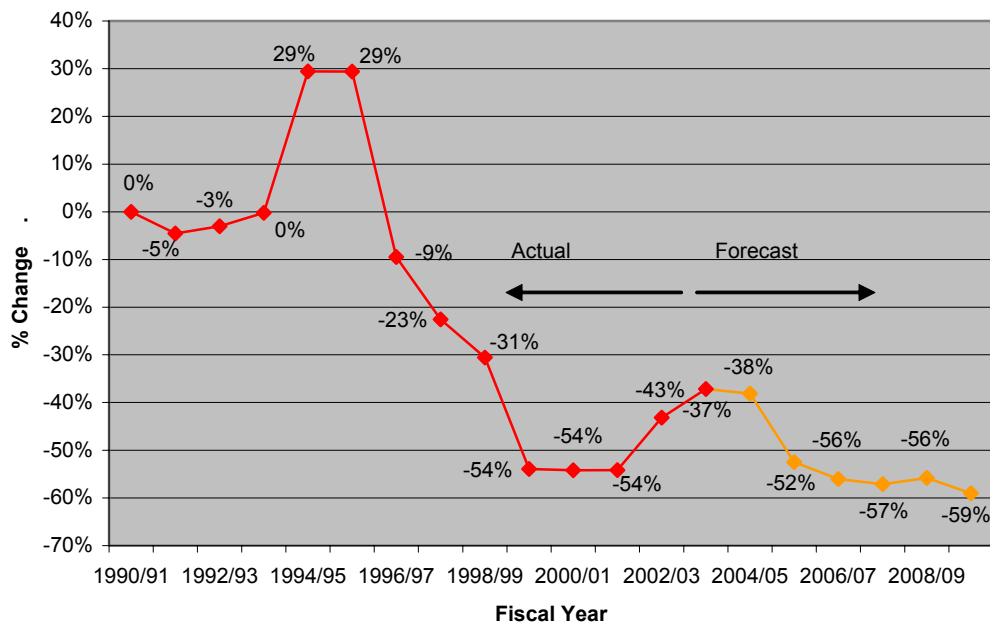



When natural gas becomes more readily available to northern communities, NTPC will consider the economics and GHG reduction benefits of retrofitting existing diesel power plants to natural gas.

### **Business As Usual Forecasting**

Past projects that have resulted in GHG reductions are reflected in our forecast emissions for the period between 2004/05 and 2009/10. The use of techniques such as three-year weighted averages for fuel efficiencies and using the most recent year's data to forecast future years helps to capture the trends that result in GHG reductions and to represent them in forecasts. This is how we develop our "Business As Usual" forecasts to include existing efforts. This helps to improve our supply-

side management through improved diesel engine efficiency programs, reduced station service, residual heat projects, upgraded streetlights, and reduced line losses from transmission and distribution systems.

### **Emissions Reductions Targets**

As NTPC has successfully decreased its emissions below the 1990 Baseline and our own internal target of 10% below 1996/97 levels, we feel our "Business As Usual" forecast, capturing improved trends in our existing initiatives, is sufficient for the time being. Any major changes to our operating infrastructure will be adopted if they represent an economic benefit as well as a savings in GHG reductions.



# RESULTS ACHIEVED and MEASURES TO ACHIEVE RESULTS

**N**TPC has successfully reduced GHG emissions through a number of programs since 1990/91. The following section describes individual initiatives taken in 2003/04 that contributed to GHG reductions and/or their impacts on future reductions.

NTPC endeavours to improve overall efficiency. Improving operating efficiency reduces reliance on fossil fuels to generate and distribute energy to customers. The benefits of improving efficiency reach beyond NTPC's direct emissions.

The vast geographic area and remoteness of the region means that significant resources and energy must be expended in order to transport fuel to each of NTPC's sites. By reducing the volume of fuel required to generate power, the overall energy (derived from fossil fuels) required to transport fuel to generating sites is also reduced. All NTPC sites have fuel delivered via truck tanker or tug and barge.

Examples of individual projects undertaken by NTPC to reduce dependence on fossil fuels and production of GHG emissions during 2003/04 follow below. Table 7 summarizes the cumulative aggregate savings for all initiatives from 1990/91 to 2003/04. The table in Appendix 1 shows actual and forecast GHG emissions savings by gas type as well as total CO<sub>2</sub> equivalent emissions for all initiatives since 1990/91 forecast to 2009/10.

**Table 7: Cumulative Aggregate Emissions Savings**

CO <sub>2</sub> Equivalent Reductions (Tonnes) 1990/91—2002/03				
Alternative Generation/Fuels	Station Service Reduction/Residual Heat Projects	New Engine Upgrades/PLCs	Streetlight Upgrades	Total
602,512	6,205	47,226	1,084	<b>657,027</b>

## Fuel Efficient Engine Upgrades

In recent years, diesel engine technology has improved the overall fuel efficiency of engines while reducing emissions. Engine selection analysis is based primarily on life-cycle costs. The most significant of those life-cycle costs is fuel, which accounts for 85-90% of the capital and operating costs of a diesel engine over its life. Therefore, it is extremely important to NTPC to replace aging equipment with the most fuel-efficient units available.


In 2003/04, NTPC installed three new diesel engines in three remote communities in the NWT. Table 8 identifies community plants that received new engines in 2003/04 as well as changes in each plant's fuel efficiency since 2002/03 after only a partial year of operation. In March of 2004, the Wrigley plant also received a new engine, but since it was introduced too late in the fiscal year to retrieve any data on efficiencies, it will be covered in the 04/05 VCR report.

**Table 8: Fuel Efficiency Improvements as a Result of New Engine Installations**

Community Plant	Plant Efficiency (kWh/L)		Date Commissioned
	2002/03	2003/04	
Tulita	3.58	3.66	Mar-03
Fort Liard	3.85	3.76	Jan-04
Rae Lakes	3.35	3.54	Jan-04

Figure 7 illustrates our Corporate efficiency trend, which is improving with time. Yellowknife and Inuvik, two of our largest diesel generating plants, operate as backup diesel generators in the event that hydro or natural gas generation, respectively, become unavailable. Due to the low frequency with which these plants now operate, their fuel efficiencies have decreased accordingly. For this reason the Yellowknife and Inuvik plants have been excluded from this graph as they skew the data.

Figure 7: Corporate Fuel Efficiencies Excluding Yellowknife and Inuvik

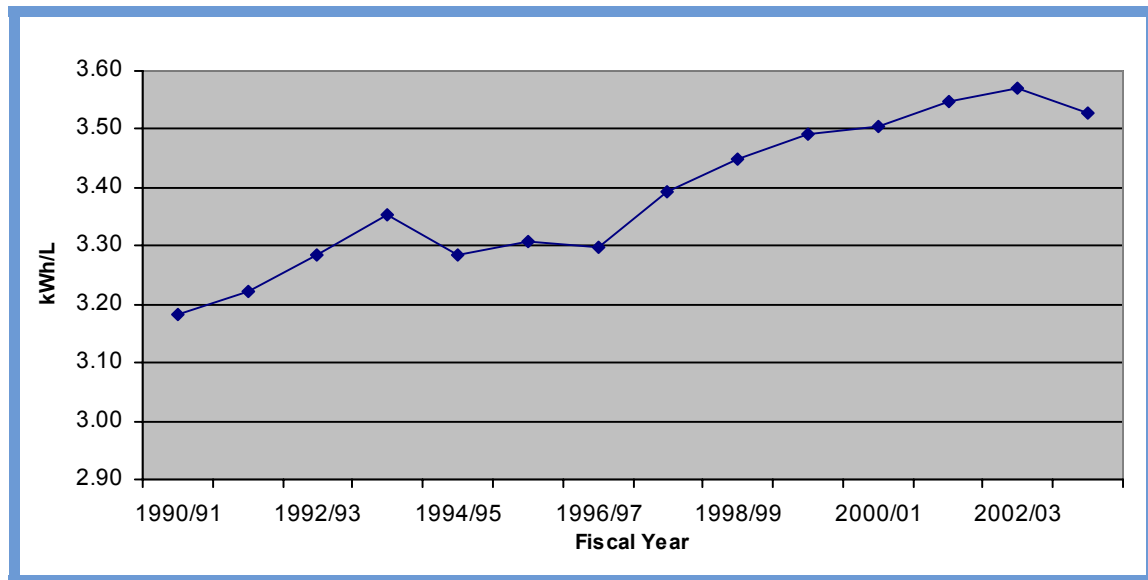

The overall fuel efficiency for NTPC in 2003/04 (excluding standby plants) is nearly 11% higher than the 1990/91 efficiency.

Our day-to-day operations, maintenance, and capital planning focus on maintaining or improving our fuel efficiency. Therefore, our upward trend in fuel efficiencies are reflected in our forecasts for fuel consumption, and hence our forecast GHG emissions.

### Programmable Logic Controllers (PLC)

Programmable Logic Controllers automate power plant diesel engines and help ensure that the appropriate engine is operating to most efficiently service fluctuating loads. This contributes to improved plant fuel efficiency. As it is impossible to separate PLC efficiency improvements and gains from upgrading to more fuel-efficient engines, the benefits of PLCs and new engines were calculated together in the Fuel Efficient Engine Upgrades section.

To date, all but three plants have some level of PLC automation; Fort Resolution, Jean Marie River, and Fort Smith. The Fort Resolution standby unit is to be automated by March of 2005, while Fort Smith and Jean Marie River are not yet slated for PLC automation.

### Reduction in Station Service / Residual Heat Recovery

NTPC is continuously investigating ways to reduce its own consumption of power. Some of the equipment and design improvements utilized to reduce station service at our plants include:

- replacement of in-plant electric space heating with residual heat from engine jacket water systems;
- replacement of engine electric block heaters with residual heat circuits that utilize jacket water heat from operating engines;
- replacement of inefficient lighting;
- installation of separate lighting circuits so that only specific lights are on at certain times;
- installation of variable frequency drives on radiators; and
- installation of photo sensors on all outside lighting.

Station service reductions have also come through education and heightened awareness of plant personnel. Small measures are highlighted, such as turning off lights when plants are unattended, turning heaters down or off when not required, and ensuring that any pipes or other appurtenances that require heat tracing during winter months are shut-

off during spring and summer months.


Since 1990/91, NTPC has successfully reduced overall Corporate station service. Through frequent audits of operations and diligent efforts to implement station service reducing technologies and practices, we will continue to reduce our station service in future years. Figure 8 illustrates station service for NTPC diesel generating facilities (except standby plants) for 1990/91 and 2003/04.

### Colville Lake Residual Heat Project

In recent years, the Corporation has been a leader in a number of projects to recover and distribute waste heat from its diesel engines to external customers, and for its own purposes. The most recent project involved upgrading the heating system at the Colville Lake diesel generating station in 2001/02.

Prior to 2001/02, the Colville Lake facility was heated electrically. Station service for this facility ranged from 20% to 37% of annual gross genera-


**Figure 8: Station Service for Diesel Plants (excluding standby plants) for 1990/91 and 2003/04**

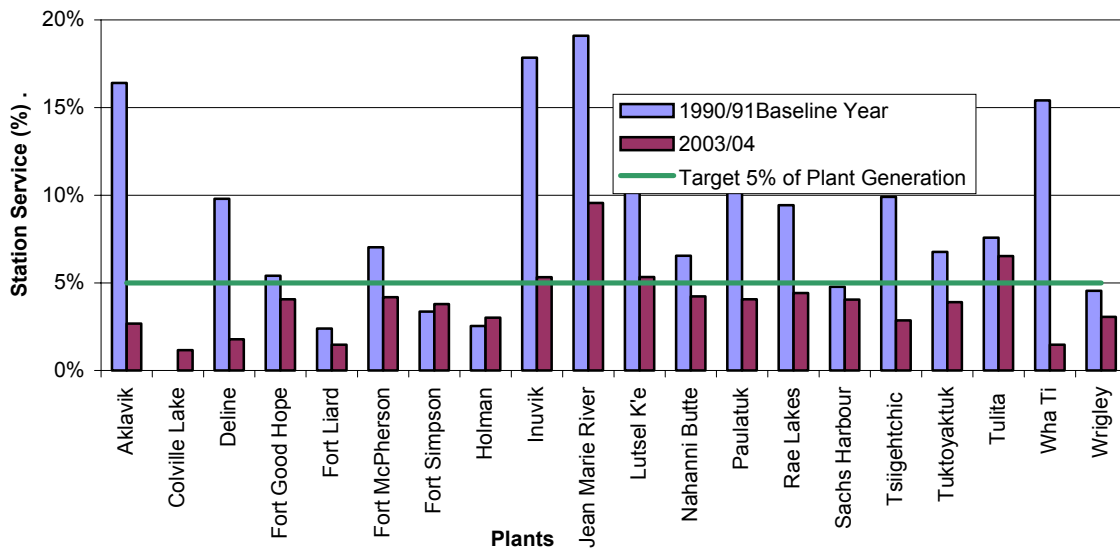

By diligently monitoring facility statistics, NTPC is able to identify sites where station service requirements are in excess of acceptable levels. NTPC set a target for each facility to achieve and maintain a station service less than or equal to 5% of its total generation. All but four plants currently operate in excess of the 5% target, an improvement of two plants since 2002/03. NTPC will continue to monitor station service and work to reduce it at the remaining four plants still exceeding the 5% target while maintaining all other site station service percentages below the target.

tion, well in excess of NTPC's acceptable level of 5%. In 2001/02, a retrofit of the modular plant was completed which provided residual heat for the plant, office/warehouse, and crew trailer. This resulted in a station service decrease of 38,763 kWh in the first partial year following installation, a further 11,191 kWh in 2002/03, and 1,237 kWh further to that in 2003/04 (49,954 kWh in total). This translates into a decrease of nearly 53 tonnes of CO<sub>2</sub> equivalent GHG emissions resulting primarily from the utilization of residual heat. Figure 9 illustrates the Colville Lake facility station service since facility construction in 1993/94.

Figure 9: Colville Lake Station Service from 1993/94 to 2002/03

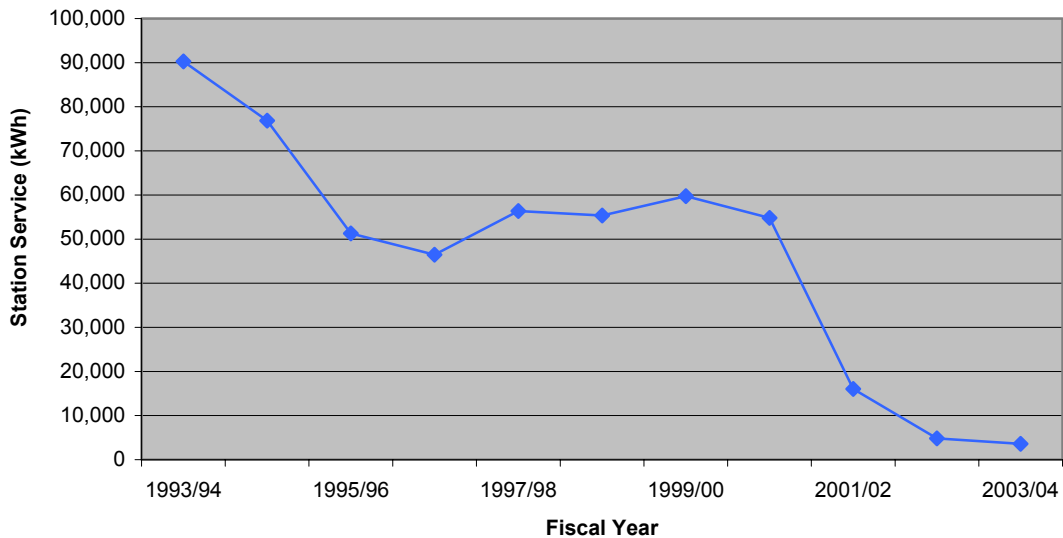

### Alternative Generation Fuels / Methods

In recent years, NTPC has undertaken a number of initiatives to produce less GHG emissions by utilizing alternative methods or fuel sources to generate power. Some of these initiatives have involved major capital projects such as the Inuvik Gas Project and major changes to hydro infrastructures. Simpler initiatives included the purchase of additional GHG-free hydropower. Some alternative generation fuels/methods are summarized below.

#### Bluefish Hydro Purchase

NTPC purchased the Bluefish hydro facility in the spring of 2003. The Bluefish hydro facility has been used primarily to serve Con Mine. In November of 2003, Con Mine terminated mining operations. As mine operations require less energy, this will eventually allow NTPC to displace diesel generation with Bluefish hydro generation to supply Yellowknife's electricity demands. Between 2004/05 and 2009/10, Bluefish hydropower will displace approximately 185,595 tonnes of CO<sub>2</sub>e emissions.

### Proposed Hydro Developments

NTPC continues to investigate the feasibility of additional hydro developments. The proposed Great Bear Hydro project has been researched since 2001, and is still in the pre-feasibility/conceptual stage. Energy from the Great Bear River would be used to supply power to the proposed Mackenzie natural gas pipeline. The next major step in this project will be feasibility and environmental studies. NTPC's second proposed new hydro initiative is the Snap Lake Hydro project. This would involve the expansion of the Taltson hydro site to power the proposed Snap Lake diamond mine. This project is at the feasibility and environmental study stage.

NTPC has worked closely with local aboriginal partners regarding power generation for each of the proposed projects. Life-cycle analyses of the pipeline and mine were carried out to determine both GHG and dollar savings when replacing natural gas and diesel generated electricity with hydroelectricity.


## Mini Hydro in Lutsel K'e

NTPC has conducted a pre-feasibility study on the Lutsel K'e Mini-Hydro project. The project involves building a 500 - 1000 kW mini-hydro plant on the Snowdrift River to serve Lutsel K'e's electricity and heating requirements. Recommendations from the study are to proceed to a detailed feasibility study and investigate funding sources. If this project goes ahead it will reduce the community's annual diesel fuel consumption by about 800 kL, approximately 400 kL of which is currently used to generate electricity. Communications with the community began in December 2001 and are ongoing.

Development (RWED) to replace all MV streetlights in certain communities with HPS lights, the effects of which will be seen in our 2004/05 report. For the remainder of the communities, HPS lights will be exchanged following the end-of-life of the existing MV lights. Figure 10 illustrates the average amount of energy required per streetlight in NTPC service communities. As more MV lights are replaced with the more efficient HPS lights, the average kWh required per streetlight decreases.

GHG savings from our continuing streetlight replacement program are shown in Table 7.

Figure 10: kWh per Streetlight per Year

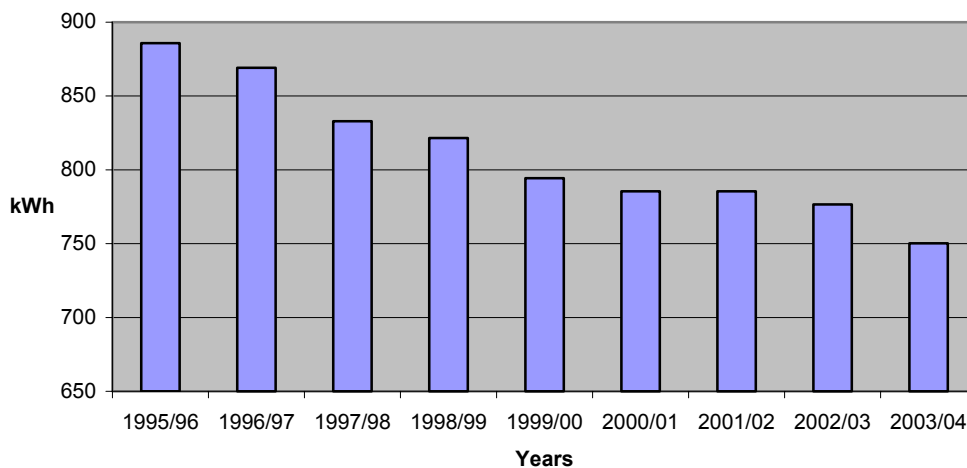

## Streetlight Replacement

NTPC is working with each individual community to decide whether to convert to High-Pressure Sodium (HPS) lighting from less efficient Mercury Vapour (MV) streetlights. In order to promote the program, NTPC informs the communities of the benefits resulting from conversion. We began converting community streetlights from MV to HPS during the 1995/96 fiscal year. To date, eight communities have converted every streetlight in their community to HPS. Some funding is available from the department of Resources, Wildlife, and Economic

## Transmission and Distribution Lines

Line losses increase generation requirements, which contribute to increases in greenhouse gases. As required, transmission and distribution systems will be upgraded with new efficient conductors and transformers in order to reduce line losses.

## Residential Energy Efficiency Program

Customer Research Surveys completed in 2000 and 2002 confirmed that customers would like more information on how to make their homes

more energy efficient. To meet their needs, NTPC implemented a Residential Energy Efficiency Program in 2002/03 targeting the 13 remote northern communities of the Delta-Sahtu region. This program proved highly successful, with nearly 500 customers participating in the program. Each participant received valuable energy efficiency tips, as well as energy saving light bulbs and an energy-efficient showerhead. The energy efficiency assessments showed that high power consumption was primarily caused by inefficient, outdated, or poorly maintained electrical appliances. Due to the success of this program in the Delta-Sahtu region, NTPC plans to run the program in other regions in 2004/05 and 2005/06. The program will once again include the following key objectives:

- To conduct comprehensive energy efficiency audits of residential homes;
- To provide customers with information pertaining to energy efficiency solutions and how to obtain them;
- To provide customers with information pertaining to climate change and how energy conservation can make a difference; and

- To discuss with customers any concerns regarding the service and electricity currently supplied to them by NTPC.

## Results in Comparison to Targets

### GHG Emissions

Our internal target to reduce GHG emissions by 10% of 1996/97 levels in 10 years was achieved by 1998/99. To date, we have reduced our cumulative CO<sub>2</sub> equivalent emissions by 657,027 tonnes and achieved a 37% decrease in 2003/04 from 1990/91 levels.

### CO<sub>2</sub>e Station Service Target

So far, NTPC has successfully reduced station service at all but four facilities to less than 5% of their total generations, compared to six facilities in 2002/03. NTPC will continue to monitor station service and, where feasible, implement training and technologies to reduce station service at the remaining six diesel-generating facilities to meet the 5% target.




# CLIMATE CHANGE AWARENESS

NTPC is committed to both employee and customer education regarding energy awareness. We hope to create an awareness of energy efficient practices and measures that can be implemented by all to ensure that the maximum benefit is derived from the electricity produced. Climate Change issues are discussed in conjunction with many of our programs to promote energy awareness and conservation. The communication avenues discussed below are utilized to inform employees and the public of the many ways in which they can contribute to decreases in GHG production.

Our customer newsletter, **Energy @ Work**, provides energy-saving information that can be utilized within homes and communities to reduce energy demands. Some of the topics highlighted in our 2003/04 **Energy @ Work** newsletters included energy saving tips, benefits of alternative power generation, and information on programs that we as a corporation employ to reduce GHG emissions.

The simple addition of a bicycle rack outside of our head office provides an incentive for emissions reduction by employees, both inside and outside of work. As well, number of employees, both in the office and the field, make a point of walking to and from work. This is not only healthy for the individual, but an environmentally friendly alternative to driving, and sets a good example for other members of their respective communities.

NTPC was awarded **Gold Champion Level Reporter** status by the VCR for our 2002/03 VCR submission. This, along with our previous reports, was made available on our website and our award was promoted to our customers through our **Energy @ Work** newsletter and local newspapers.

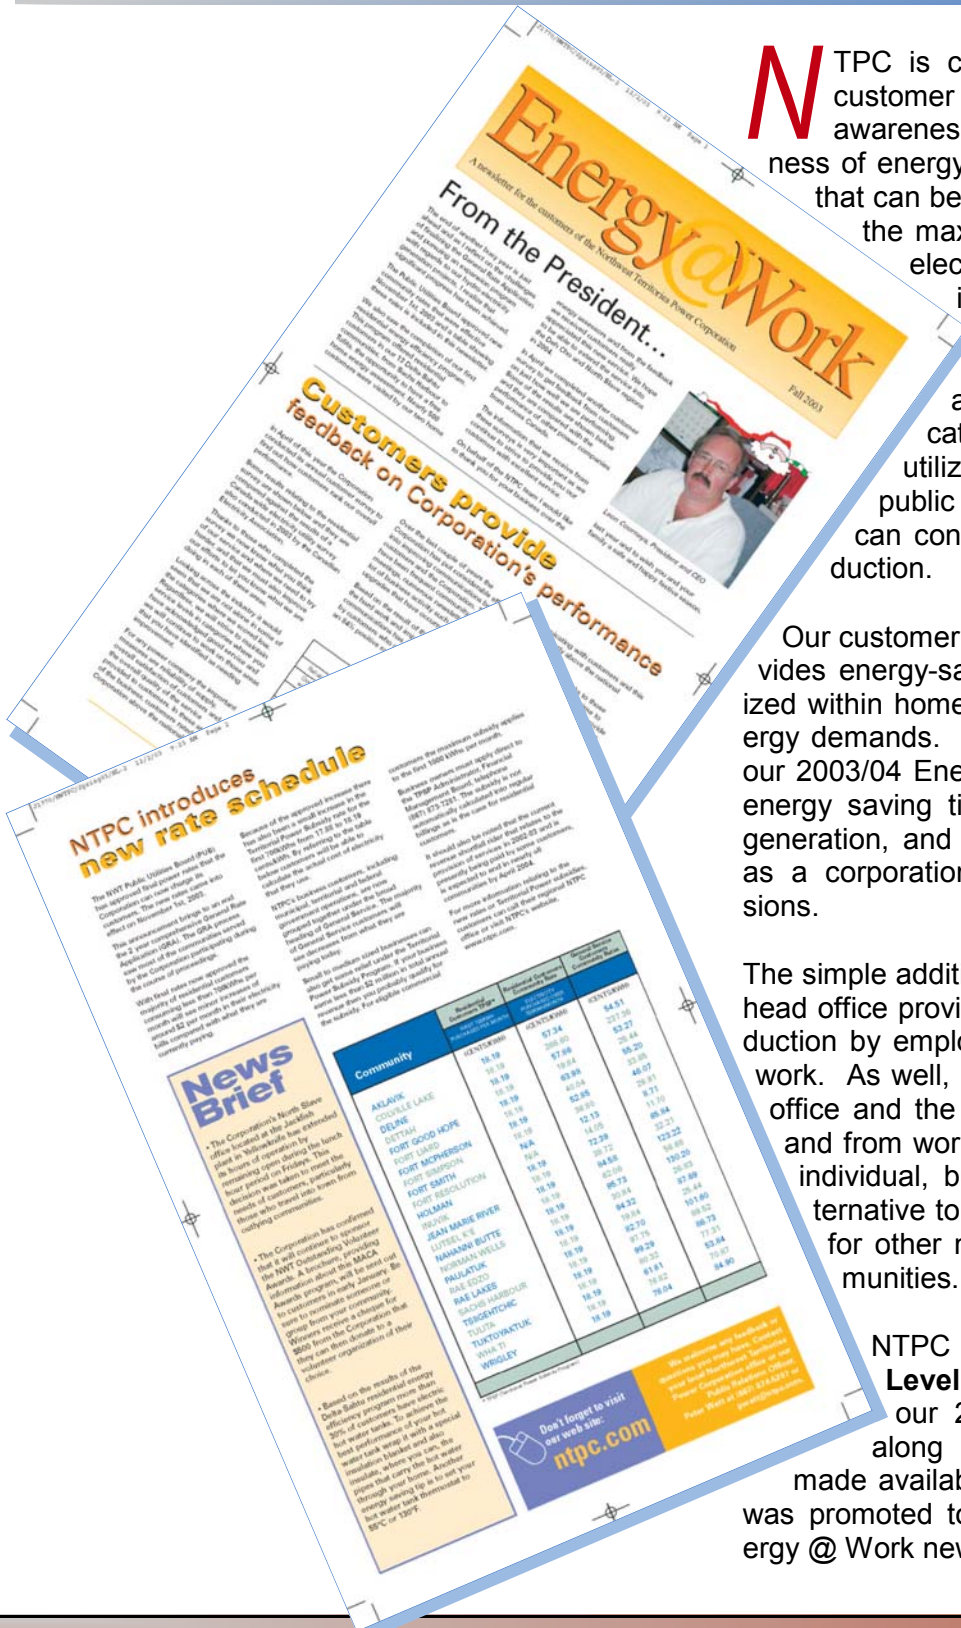


NTPC was a founding member of the **Arctic Energy Alliance** (AEA), and is a sustaining member today. The AEA is a not-for-profit organization established in 1997. The AEA's mandate is to help reduce the financial costs and environmental impacts associated with energy and utility services in the NWT (including GHG emissions).

On the **Supply-side Management** end, NTPC purchases fuel oil that is low in sulphur content (0.05%), as specified by the Canadian General Standards Board.

In 2001, NTPC ran a series of workshops for commercial customers to explain **Demand-side Management**. It was communicated that if customers could better manage their power usage to minimize peaking, they would save both money and power, at the same time reducing the production of greenhouse gases. In 2002, inspired by positive feedback from the workshops, NTPC began developing a fact sheet on demand-side management to be distributed to commercial customers in the near future.

These fact sheets, with such titles as *Understanding your Power Bill*, *Understanding Demand Charges*, and *Understanding Costs of Running Electrical Appliances*, have been distributed to both commercial and residential customers across the NWT.

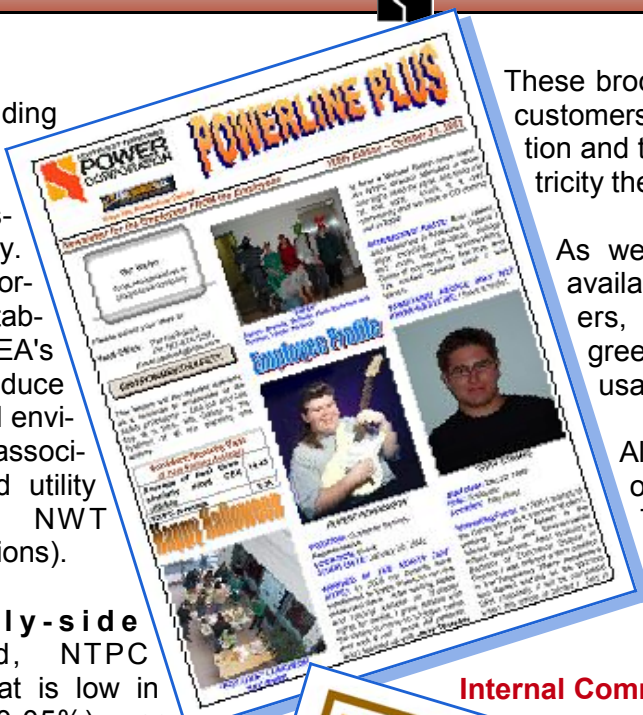

These brochures are produced to encourage customers to reduce their power consumption and to help understand how much electricity their electrical appliances really use.

As well, **Good News Posters** are now available to our employees and customers, graphing such information as greenhouse gas emissions and fuel usage.

All of our publications are available on our website at [www.ntpc.com](http://www.ntpc.com). The site also promotes NTPC's objective of reducing GHG emissions through reductions in customers' household energy usage.


### Internal Communications



An employee-generated newsletter, **Powerline Plus**, is distributed to all employees on a monthly basis via email and our internal website.

Articles include updates regarding NTPC's GHG emissions status and various ways to conserve energy. A new employee

publication, **The Report**, is now circulated to employees as well. The Report contains more in-depth articles about NTPC business for employees, including proposed hydro developments and alternative energy generation, and is available on the NTPC internal website.

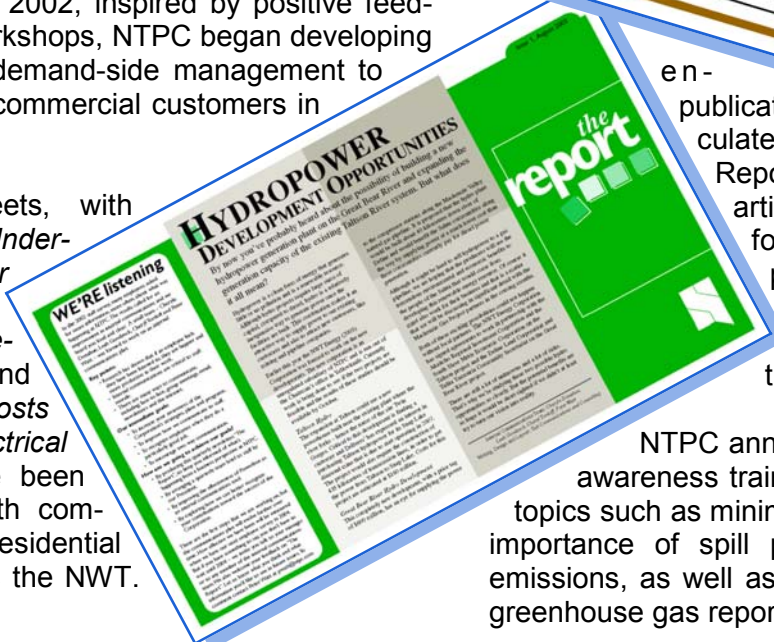

NTPC annually provides environmental awareness training for employees, covering topics such as minimizing station service and the importance of spill prevention reducing fugitive emissions, as well as providing an update on our greenhouse gas report.

## CONCLUSION

The Northwest Territories Power Corporation has undertaken many successful initiatives towards reducing greenhouse gases. Our VCR reports demonstrate our commitment to combating climate change, as we believe that environmental issues should be at the forefront of all business. NTPC is committed to further reducing GHG emissions wherever feasible. We will continue to implement new ideas and strategies to conserve fuel usage, and subsequent emissions, while openly reporting our progress and initiatives.



**For More Information Please Contact::**

Northwest Territories Power Corporation  
4 Capital Drive  
Hay River, NT X0E 1G2

Telephone: 867 - 874 - 5200

Fax: 867 - 874 - 5251

Email: [info@ntpc.com](mailto:info@ntpc.com)

Or visit our website at [www.ntpc.com](http://www.ntpc.com)



## Appendix 1: NTPC Greenhouse Gas Emissions 1990/91 to 2009/10

	1990/91	1991/92	1992/93	1993/94	1994/95	1995/96	1996/97	1997/98	1998/99	1999/00	2000/01	2001/02	2002/03	2003/04	2004/05	2005/06	2006/07	2007/08	2008/09	2009/10
<b>Alternative Generation/ Fuels</b>																				
<b>Snare Cascades</b>																				
CO <sub>2</sub>							18,036	17,342	17,811	22,083	20,487	18,178	19,607	19,256	16,688	17,596	17,332	18,243	18,602	18,602
CH <sub>4</sub>							0.86	0.83	0.85	1.05	0.98	0.87	0.93	0.92	0.79	0.84	0.83	0.87	0.89	0.89
N <sub>2</sub> O							2.64	2.54	2.61	3.24	3.00	2.66	2.87	2.82	2.45	2.58	2.54	2.67	2.73	2.73
CO <sub>2</sub> Equiv.							18,873	18,147	18,638	23,108	21,438	19,022	20,518	20,149	17,463	18,413	18,136	19,090	19,465	19,465
<b>Snare Rapids G2<sup>1</sup></b>																				
CO <sub>2</sub>							2,387	1,954	1,954	1,503	2,551	2,410	867	191	-	-	-	-	-	-
CH <sub>4</sub>							0.11	0.09	0.09	0.07	0.12	0.11	0.04	0.01	-	-	-	-	-	-
N <sub>2</sub> O							0.35	0.29	0.29	0.22	0.37	0.35	0.13	0.03	-	-	-	-	-	-
CO <sub>2</sub> Equiv.							2,498	2,045	2,045	1,572	2,669	2,522	907	200	-	-	-	-	-	-
<b>Norman Wells Purchased Power</b>																				
CO <sub>2</sub>	2,302	2,329	2,345	2,471	2,456	2,188	2,074	2,314	2,327	2,179	2,150	2,148	2,192	2,526	2,410	2,477	2,524	2,531	2,539	2,546
CH <sub>4</sub>	-0.76	-0.77	-0.77	-0.82	-0.81	-0.72	-0.68	-0.76	-0.77	-0.72	-0.71	-0.71	-0.72	-0.83	-0.80	-0.82	-0.83	-0.84	-0.84	-0.84
N <sub>2</sub> O	0.83		0.85	0.89	0.89	0.79	0.75	0.84	0.84	0.79	0.78	0.78	0.79	0.91	0.87	0.90	0.91	0.92	0.92	0.92
CO <sub>2</sub> Equiv.	2,545	2,574	2,592	2,731	2,715	2,419	2,292	2,558	2,572	2,408	2,376	2,374	2,423	2,791	2,664	2,738	2,790	2,798	2,806	2,814
<b>Inuvik Gas Project</b>																				
CO <sub>2</sub>										1,873	3,734	4,092	3,214	3,136	3,369	3,506	3,659	3,715	3,771	7,850
CH <sub>4</sub>										-1.29	-2.18	-2.49	-2.50	-2.60	-3.08	-3.21	-3.35	-3.40	-3.45	-2.46
N <sub>2</sub> O										1.06	1.89	2.13	1.98	2.03	2.34	2.44	2.54	2.58	2.62	2.77
CO <sub>2</sub> Equiv.										2,174	4,274	4,701	3,776	3,710	4,031	4,194	4,377	4,444	4,511	8,656
<b>Bluefish Purchased Power</b>																				
CO <sub>2</sub>			18,389	18,922	15,539	24,531	34,228	32,615	27,403	35,331	38,432	39,694	36,842	35,632	21,887	27,122	32,270	32,270	32,270	35,089
CH <sub>4</sub>			0.88	0.90	0.74	1.17	1.63	1.55	1.30	1.68	1.83	1.89	1.75	1.70	1.04	1.29	1.54	1.54	1.54	1.67
N <sub>2</sub> O			2.69	2.77	2.28	3.59	5.02	4.78	4.02	5.18	5.63	5.82	5.40	5.22	3.21	3.97	4.73	4.73	4.73	5.14
CO <sub>2</sub> Equiv.			19,243	19,801	16,260	25,669	35,817	34,129	28,675	36,971	40,216	41,537	38,552	37,287	22,904	28,381	33,768	33,768	33,768	36,718

\* Snare Rapids G2 unit does not operate during average to low water years. As forecasting for the hydro system assumes average water levels, then zero G2 generation is also forecasted. However, on average, the G2 unit has accounted for approximately 0.02% of the total Snare hydro generation since installation, so some generation is anticipated even if not forecasted.



## Appendix 1: NTPC Greenhouse Gas Emissions 1990/91 to 2009/10

	1990/91	1991/92	1992/93	1993/94	1994/95	1995/96	1996/97	1997/98	1998/99	1999/00	2000/01	2001/02	2002/03	2003/04	2004/05	2005/06	2006/07	2007/08	2008/09	2009/10
<b>Station Service Reduction/Residual Heat Projects</b>																				
<b>Station Service/Residual Heat Savings</b>																				
CO <sub>2</sub>		163	100	242	295	385	319	297	349	194	161	172	174	150	155	155	155	155	155	155
CH <sub>4</sub>		0.01	0.00	0.01	0.01	0.02	0.02	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
N <sub>2</sub> O		0.02	0.01	0.04	0.04	0.06	0.05	0.04	0.05	0.03	0.02	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02
CO <sub>2</sub> Equiv.		170	104	253	309	402	334	311	366	203	168	180	182	156	162	162	162	162	162	162
<b>Fort McPherson Residual Heat</b>																				
CO <sub>2</sub>								511	423	473	450	479	440	156	156	419	419	419	419	419
CH <sub>4</sub>								0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02
N <sub>2</sub> O								0.07	0.06	0.07	0.07	0.07	0.06	0.02	0.02	0.06	0.06	0.06	0.06	0.06
CO <sub>2</sub> Equiv.								534	443	495	471	501	460	163	163	438	438	438	438	438
<b>New Engine Upgrades/PLCs</b>																				
<b>Improved Fuel Efficiency Savings</b>																				
CO <sub>2</sub>		1,655	1,375	2,907	3,295	3,879	4,169	4,107	5,129	3,660	3,571	3,975	4,365	4,081	4,187	4,246	4,298	4,323	4,349	4,375
CH <sub>4</sub>		0.08	0.07	0.14	0.16	0.18	0.20	0.20	0.24	0.17	0.17	0.19	0.21	0.19	0.20	0.20	0.20	0.21	0.21	0.21
N <sub>2</sub> O		0.24	0.20	0.43	0.48	0.57	0.61	0.60	0.75	0.54	0.52	0.58	0.64	0.60	0.61	0.62	0.63	0.63	0.64	0.64
CO <sub>2</sub> Equiv.		1,732	1,439	3,042	3,448	4,059	4,363	4,297	5,367	3,830	3,737	4,159	4,567	4,271	4,381	4,443	4,497	4,524	4,551	4,579
<b>Streetlight Upgrades</b>																				
<b>Streetlight Savings</b>																				
CO <sub>2</sub>							24	82	94	131	155	150	172	228	228	228	228	228	228	228
CH <sub>4</sub>							0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
N <sub>2</sub> O							0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03
CO <sub>2</sub> Equiv.							25	85	98	137	162	157	180	239	239	239	239	239	239	239
<b>Annual Totals</b>																				
CO <sub>2</sub>	2,302	4,147	22,208	24,542	21,585	30,982	61,238	59,220	55,490	67,426	71,690	71,297	67,873	65,355	49,081	55,749	60,884	61,884	62,332	69,265
CH <sub>4</sub>	-0.76	-0.68	0.17	0.24	0.10	0.65	2.13	1.95	1.76	1.01	0.25	-0.10	-0.25	-0.59	-1.81	-1.65	-1.57	-1.58	-1.62	-0.50
N <sub>2</sub> O	0.83	1.11	3.76	4.13	3.69	5.01	9.42	9.18	8.63	11.13	12.31	12.44	11.93	11.69	9.56	10.62	11.47	11.65	11.75	12.31
CO <sub>2</sub> Equiv.	2,545	4,477	23,377	25,827	22,731	32,549	64,178	62,020	58,105	70,762	75,349	74,995	71,386	68,727	51,767	58,770	64,169	65,224	65,702	72,832
<b>Cumulative Totals Since 1990/91</b>																				
CO <sub>2</sub>	2,302	6,450	28,658	53,200	74,785	105,767	167,005	226,225	281,715	349,141	420,831	492,128	560,001	625,356	674,437	730,186	791,070	852,954	915,286	982,248
CH <sub>4</sub>	-0.76	-1.44	-1.27	-1.04	-0.94	-0.29	1.85	3.79	5.56	6.56	6.81	6.71	6.46	5.87	4.05	2.40	0.83	-0.75	-2.37	-2.11
N <sub>2</sub> O	0.83	1.94	5.70	9.83	13.52	18.53	27.95	37.13	45.76	56.89	69.20	81.65	93.58	105.26	114.82	125.45	136.92	148.57	160.31	171.79
CO <sub>2</sub> Equiv.	2,545	7,022	30,399	56,225	78,957	111,506	175,683	237,704	295,808	366,570	441,920	516,914	588,300	657,027	708,794	767,564	831,733	896,956	962,658	1,032,945



The Northwest Territories Power Corporation would like to thank the following people for their contributions to the 2003/04 Greenhouse Gas Report:

Braam Berrub  
Myra Berrub  
Suzanne Bouchard  
Leon Courneya  
Terence Courtoreille  
Drew Farmer  
Dan Grabke  
Mark Horton  
Stephen Kerr  
Brenda Larson  
Sarah Makepeace  
Terry Rafferty  
Mark Riche  
Edward Smith  
Glenn Smith  
Colin Stang  
Joe Staszuk

